


# Arduino Mega


## EZO-O2™ Sample Code



Released 6/2020

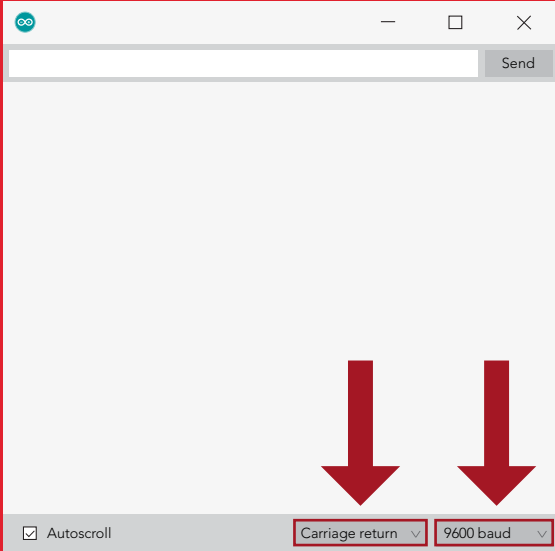

After flashing the Arduino with the code below, open the serial monitor and set it to append **carriage return** only and then set the baud rate to **9600**.

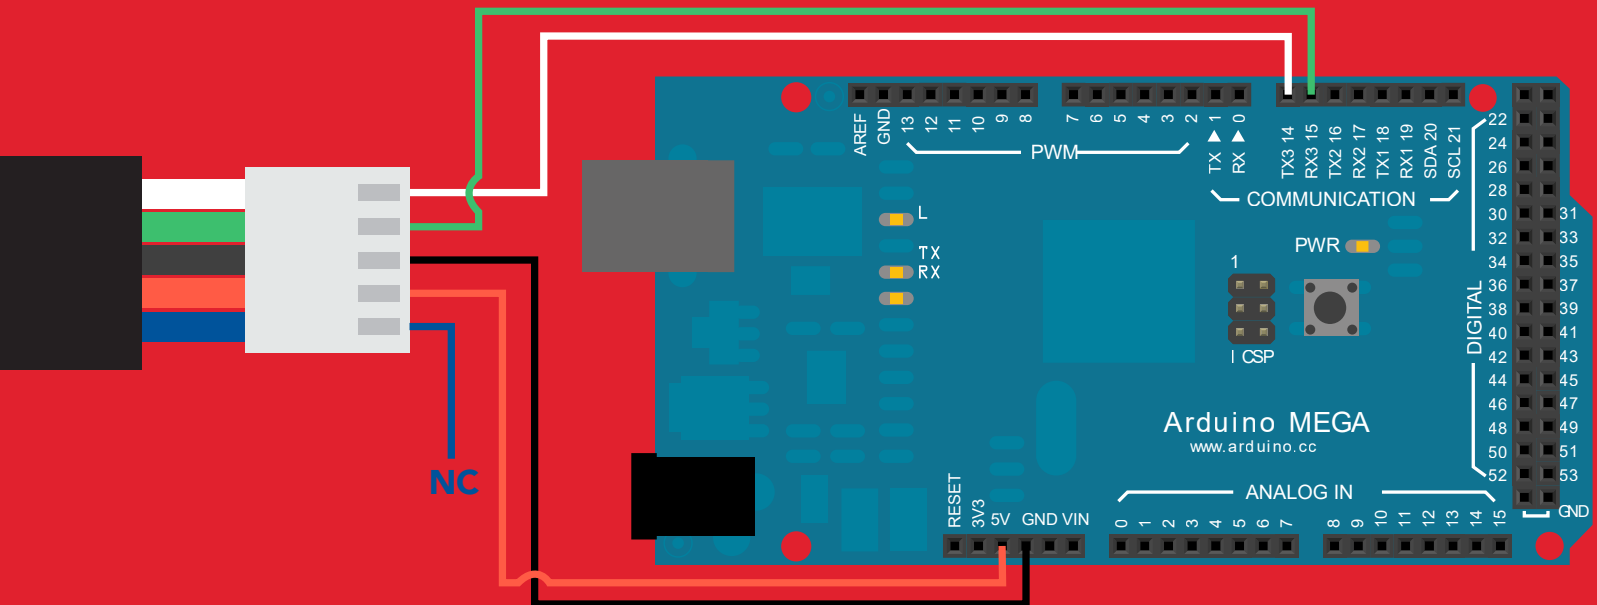

[Click here to download the sample code](#)